
CH LLENGE AILCLOTH

PC65 Polyester Cruising Laminate

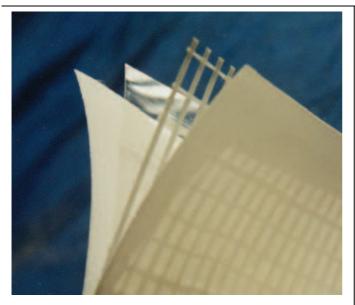

Challenge Sailcloth is pleased to announce its line of PET polyester cruising laminates. Consisting of layers of fabric / film / scrim / fabric, these fabrics are designed for the sailor who wants the performance of a laminate with the feel and look of a woven.

Fiber / Construction

- PC65 has a scrim construction of 6 x 5 (warp x fill) yarns per inch of 1000 x 500 denier PET polyester.
- The scrim is a laid-up, non-woven matrix, made by a precise machine which inserts yarns with no crimp, so yarn masses efficiently resist stretch.
- There is a total of one mil of PET polyester film.
- Sandwiching the film and scrim is a beefy 150 denier low crimp PET polyester taffeta on both sides.
- The weight is 6.7 Oz. per S.M. yard. (28.5" x 36")


Lamination

• All laminates are tested for adhesion on Challenge's state of the art impact flutter machine. Test samples of 0, 90, and 45 degree directions are smashed at high force onto a platform. After almost 1000 repetitions,

the abuse is so severe that laminates with anything but superb adhesion fly apart. Other tests include: wicking, soaking, action-cycled washing, tear, breaking, and abrasion.


Applications

- Radial mainsails, jibs and # 3' on boats up to 36 feet.
- Light # '1's on boats to 48'.
- # 2 genoas on up to 41' boats.

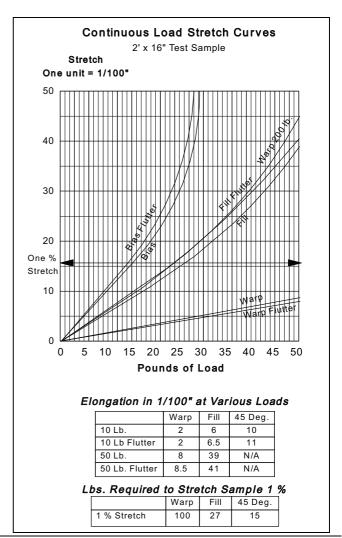

CT - USA 860-871-8030 * California - USA 949-722-7448 * web site: challengesailcloth.com UK 44-0-1489-581696 * Norway 47-2265-7610 * Australia 61-0-29638-4333

PC75 Polyester Cruising Laminate

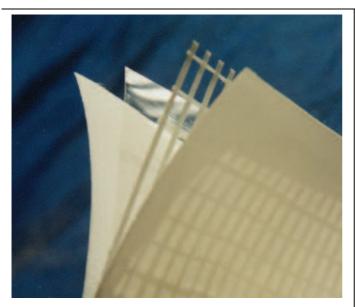

Challenge Sailcloth is pleased to announce its line of PET polyester cruising laminates. Consisting of layers of fabric / film / scrim / fabric, these fabrics are designed for the sailor who wants the performance of a laminate with the feel and look of a woven.

Fiber / Construction

- (PC75 has a scrim construction of 6 x 5 (warp x fill) yarns per inch of 2000 x 500 denier PET polyester.
- The scrim is a laid-up, non-woven matrix, made by a precise machine which inserts yarns with no crimp, so yarn masses efficiently resist stretch.
- There is a total of 1.5 mils of PET polyester film.
- Sandwiching the film and scrim is a beefy 150 denier low crimp PET polyester taffeta on both sides.
- The weight is 7.7 Oz. per sailmaker's yard.28.5" x 36")


Lamination

• All laminates are tested for adhesion on Challenge's state of the art impact flutter machine. Test samples of 0, 90, and 45 degree directions are smashed at high force onto a platform. After almost 1000 repetitions, the abuse is so severe that laminates with anything but

superb adhesion fly apart. Other tests include: wicking, soaking, action-cycled washing, tear, breaking, and abrasion.

Applications

- Radial mainsails and # 3 genoas on boats up to 41 feet.
- Light # '1's on boats to 62'.
- # 2 genoas on up to 48' boats.

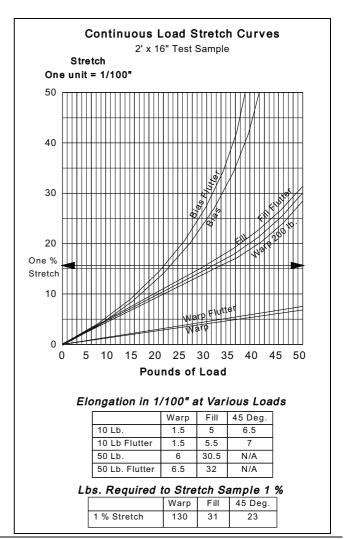

CT - USA 860-871-8030 * California - USA 949-722-7448 * web site: challengesailcloth.com UK 44-0-1489-581696 * Norway 47-2265-7610 * Australia 61-0-29638-4333